




# HTC Touch Pro CDMA Keyboard Replacement

To get to the keyboard part of the phone.

Written By: Zhaowei Zhang

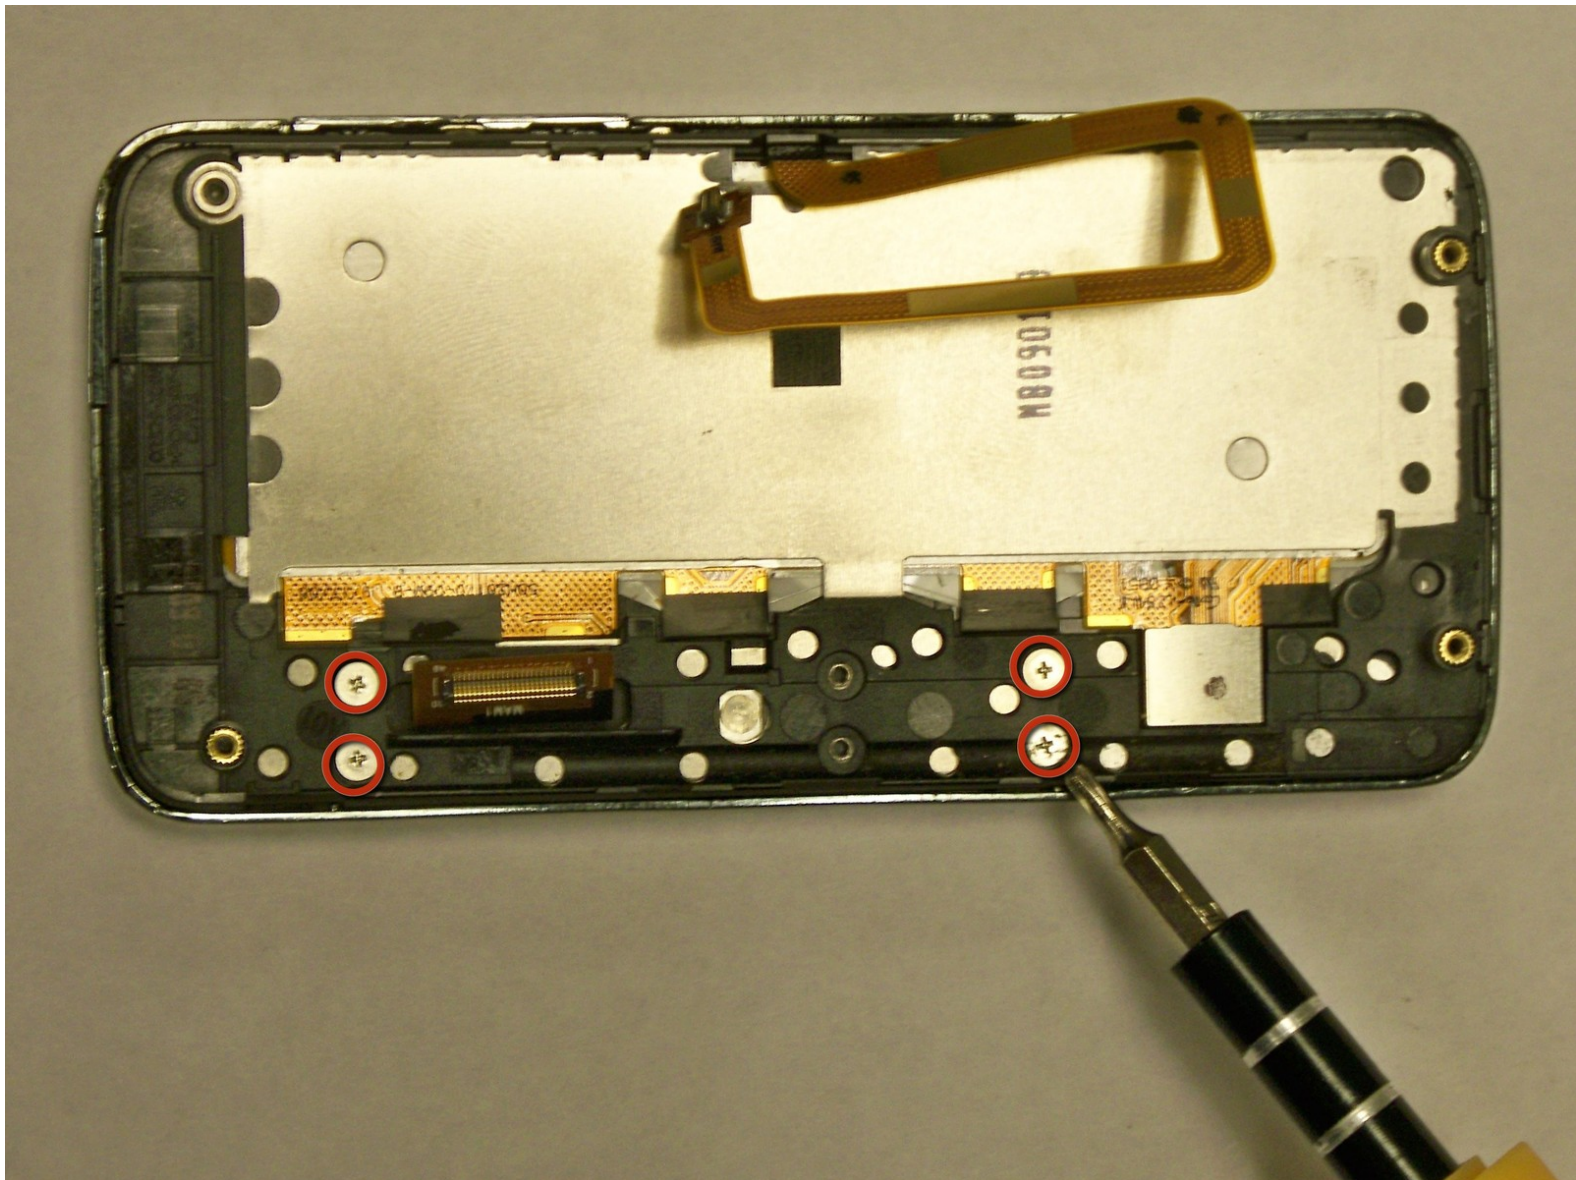

## INTRODUCTION

To replace keyboard.

---



### TOOLS:


- [Phillips #00 Screwdriver](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Battery



- Gently press on back plate, push toward camera direction.


## Step 2

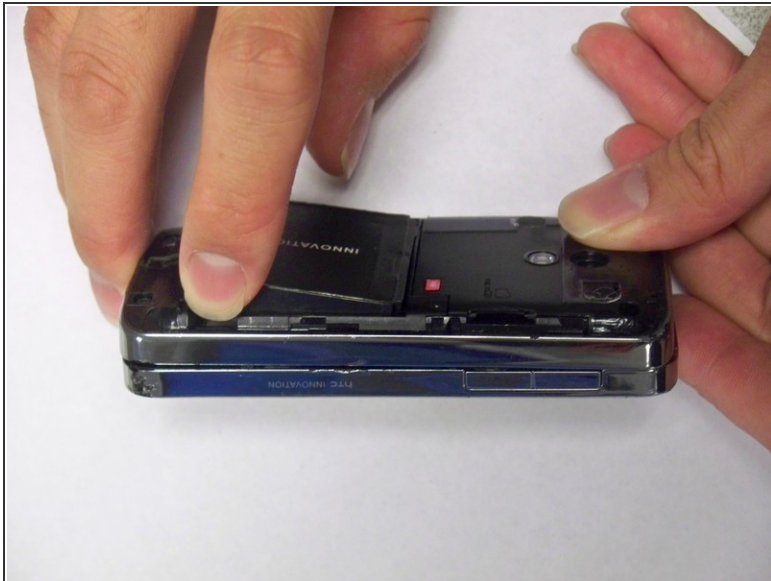

- Use finger to lift up an edge of battery.




## Step 3 — USB Logic Board

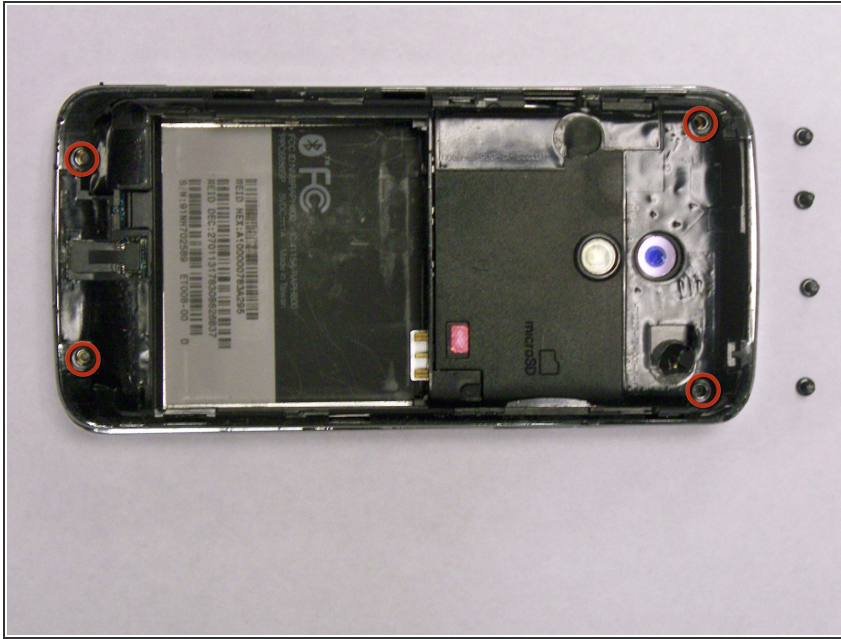


- Remove 4 screws circled in red using T6 screw driver.

## Step 4

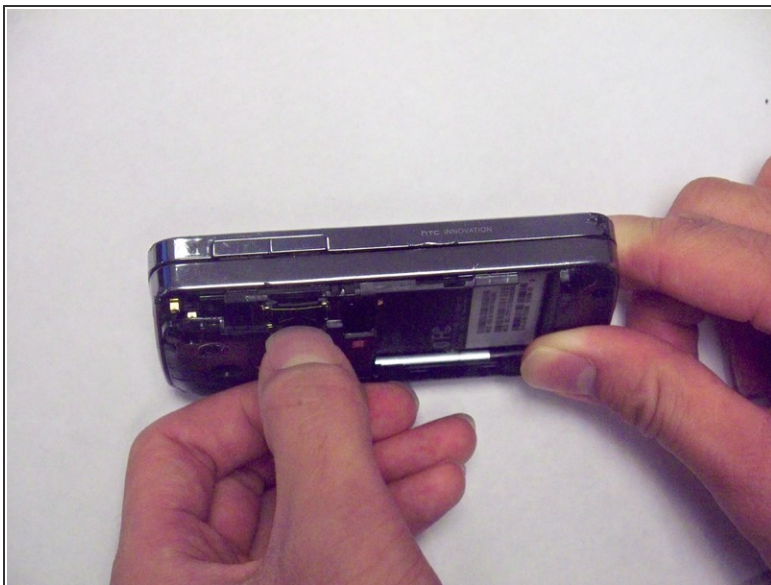


- Lift plastic cover near Memory card slot.

## Step 5

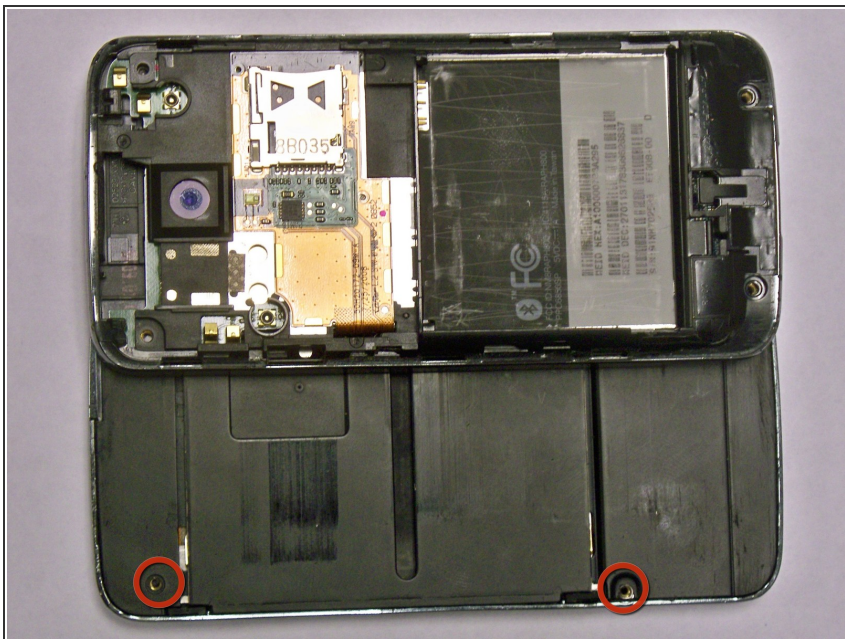

- Remove two Phillips #00 screws from the backside of the screen.



## Step 6

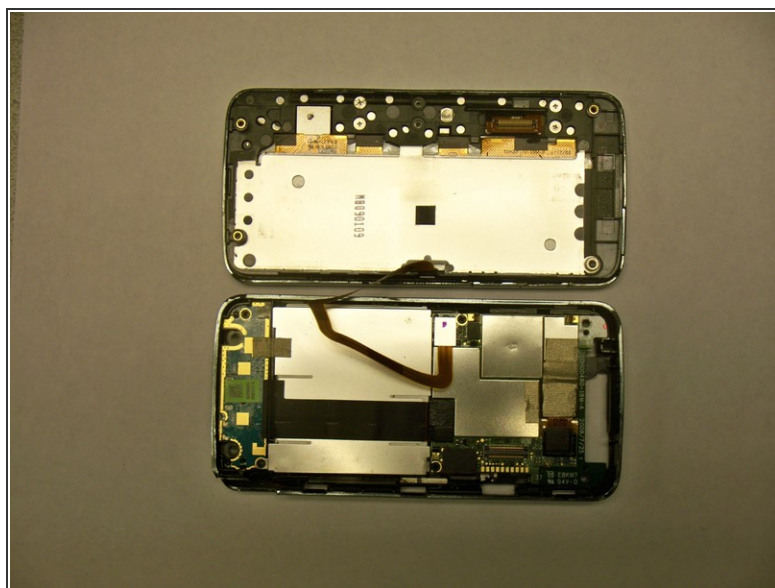

- Insert a spudger or plastic opening tool into the seam on the side of the phone.
- Gently pry apart the two halves of the phone.
- Work your way around the phone until the two halves separate.





## Step 7

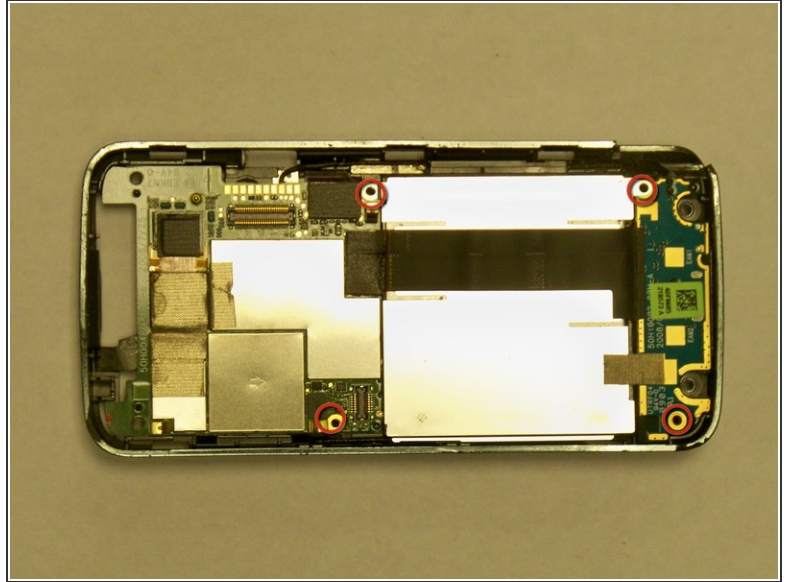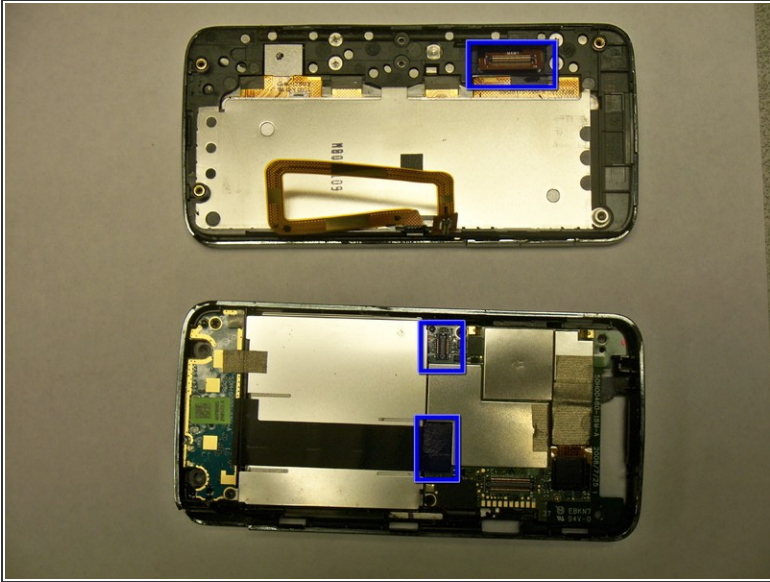

- Gently unplug connectors marked with blue rectangle.
- Remove screws circled in red with 00 Phillip screw driver.



## Step 8

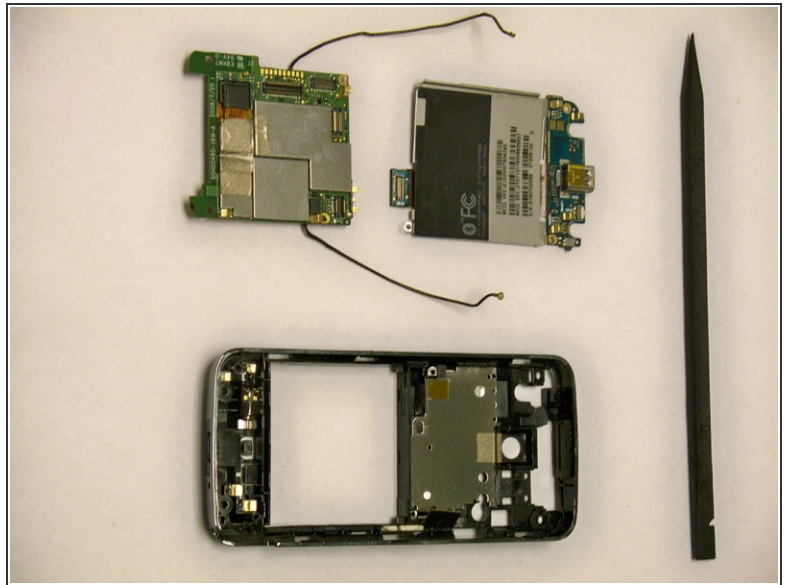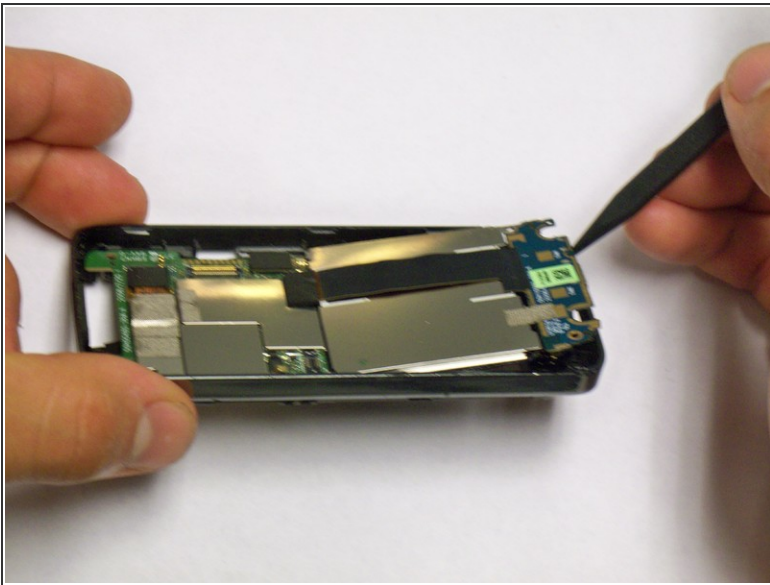

- Gently lift logic board using plastic opener tool.

⚠ Be aware of antenna

## Step 9 — Keyboard

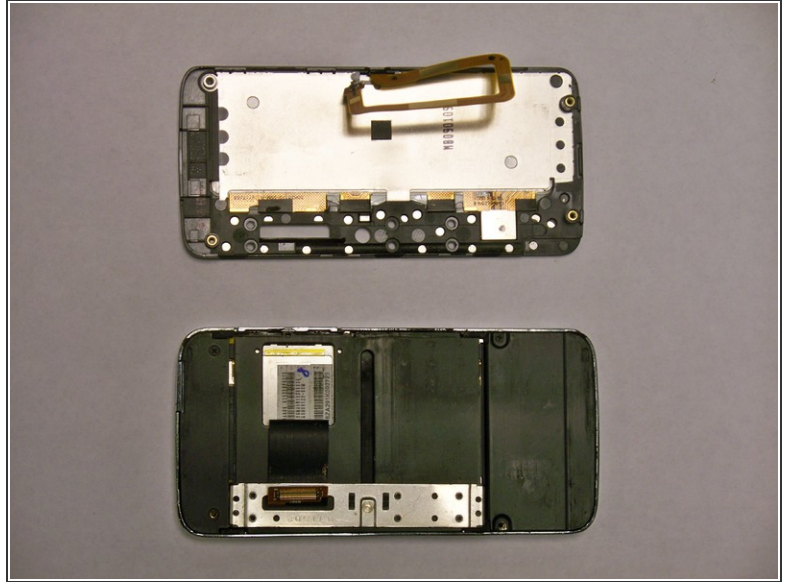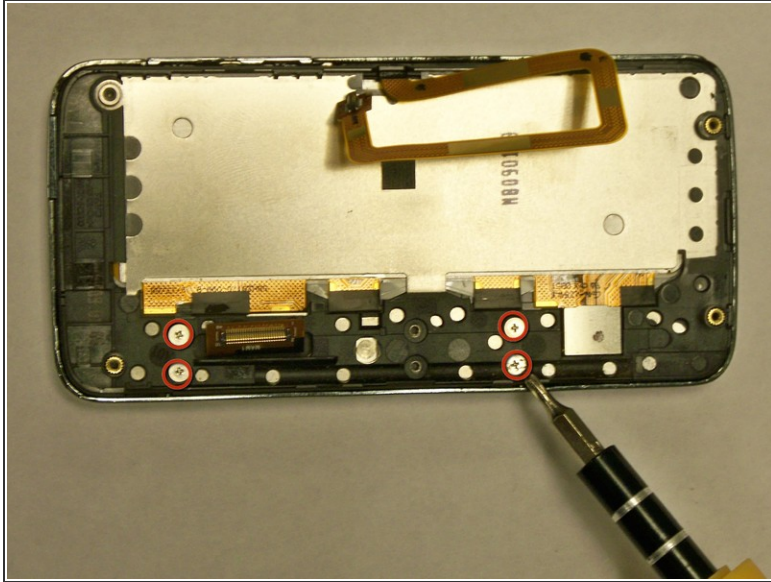

- Remove 4 screws circled in red using 00 Phillip screw driver.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 09:03:01 AM.